

Application Note

AN-001
Firmware upgrade



La Ville en Bois
44830 BOUAYE
FRANCE
☎ : 33 24078036

☎ : +33 2 40 78 22 44
✉ info@wsystem.com
<http://www.id-al.com>



Firmware upgrade

v1.0

AN-001

History

Released	Date	Description
1.0	2009/04/01	First released

Document validity


Player : Event Player
Firmware : 1.00 or sup

Firmware upgrade**v1.0****AN-001**

The purpose of this document is to describe the procedure to update the Event Player product.

The firmware upgrade is done from a **SD memory card** (SDSC/SDHC). The upgrade doesn't work from a pendrive connected to USB host with a new firmware.

- Download the firmware pack from www.id-al.com web site and unzip it on your computer.
- *Over an external card reader* : switch off the player and remove the card from the player.
Over USB : connect a USB cable from the Event Player to your computer (your computer will recognize a new mass storage).
Over Ethernet : start a FTP client (current version must be 1.10 or sup).
- Put the file **EVENT.bin** at the root directory of your card (see below).

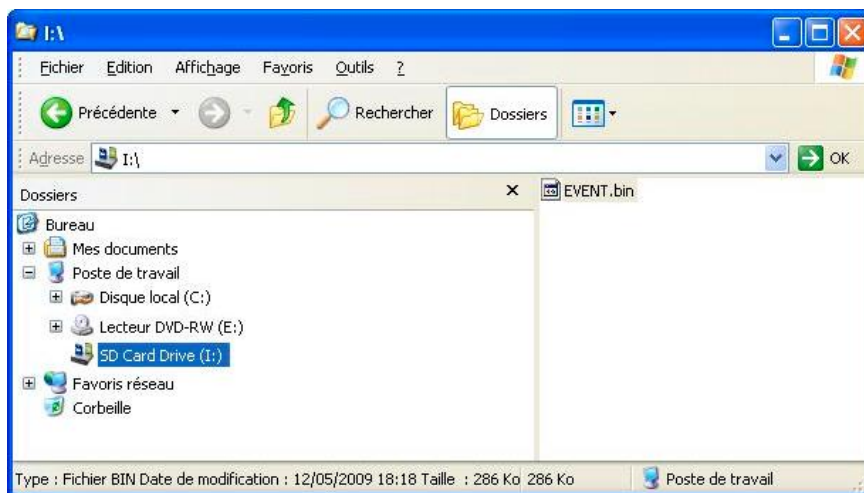

- *Over an external card reader* : put the memory card in the player and switch on.
Over USB : eject the device and unplug the USB cable.
Over Ethernet : close the FTP client (after a quit command).
- The firmware update should start (message on LCD and the leds should blink). Please, wait a moment.
- At the end, the system will reboot automatically (check that the start-up screen shows the correct firmware).
- Remove the SD Card or delete the EVENT.bin file form the SD Card.



www.wsystem.com

www.id-al.com